



Product Appearance

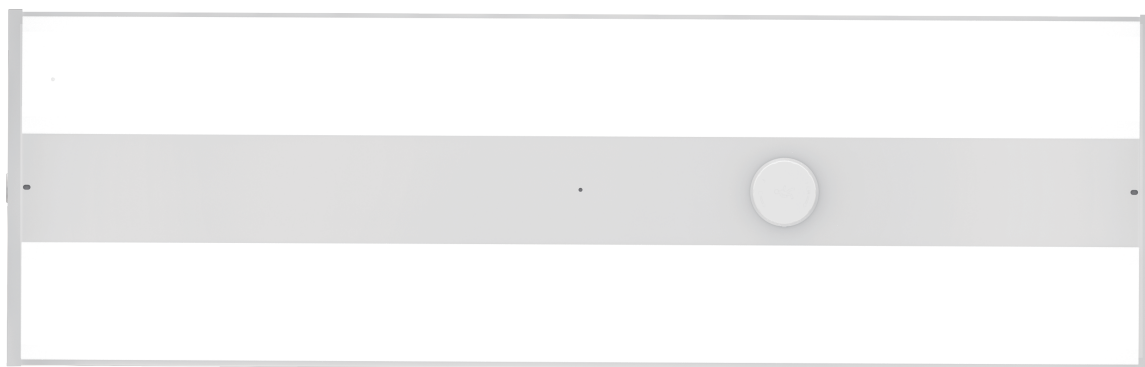

Product Features

- 1. DLC5.1 & FCC listed with LM79 & LM80.
- 2. High luminous efficacy 140 lm/W.
- 3. High quality LED driver, 0-10V dimming, Flicker free.
- 4. PF>0.95, driver efficiency >92%, THD<20%.
- 5. A new generation of integrated stamping design, with light transmittance PC cover, and UGR<28.
- 6. Installation: hanging,it can add extra motion sensor or emergency battery.
- 7. Designed for warehouses, gymnasiums, and industrial spaces.
- 8. Five years warranty.


Product Dimension

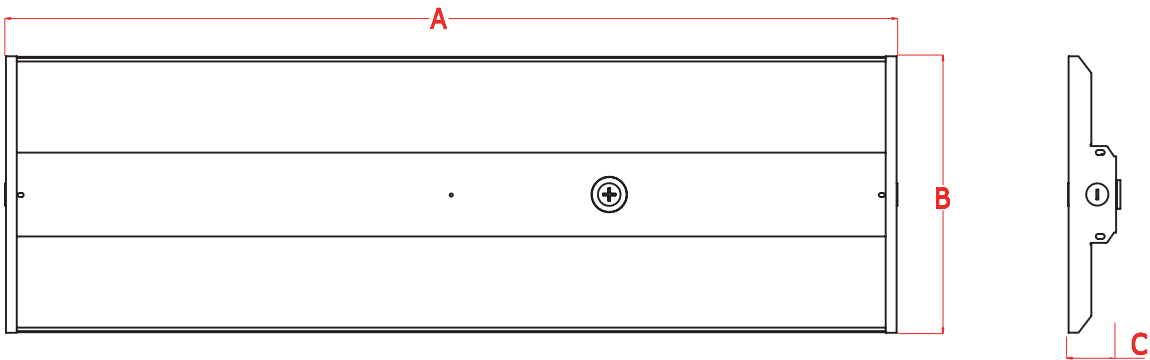

Mode	A (inch)(mm)	B (inch)(mm)	C (inch)(mm)
2FTLHBB-220WLHY-XXXXK	23.74"(603mm)	11.02"(280mm)	1.89"(48mm)
4FTLHBB-325WLHY-XXXXK	47.76"(1213mm)	11.02"(280mm)	1.89"(48mm)
2FTLHBB-220WHHY-XXXXK	23.74"(603mm)	11.02"(280mm)	1.89"(48mm)
4FTLHBB-325WHHY-XXXXK	47.76"(1213mm)	11.02"(280mm)	1.89"(48mm)

Specification

Mode	Power (Tunable)	Input Voltage	Input Current	Light Efficacy	PF	Ra	CCT (Tunable)
2FTLHBB-220WLHY-XXXXK	120W-165W-220W	AC120-277V	1.8A	140 lm/W	>0.95	>80	4000K-5000K
4FTLHBB-325WLHY-XXXXK	165W-225W-325W	AC120-277V	2.7A	140 lm/W	>0.95	>80	4000K-5000K
2FTLHBB-220WHHY-XXXXK	120W-165W-220W	AC277-480V	0.8A	140 lm/W	>0.95	>80	4000K-5000K
4FTLHBB-325WHHY-XXXXK	165W-225W-325W	AC277-480V	1.2A	140 lm/W	>0.95	>80	4000K-5000K

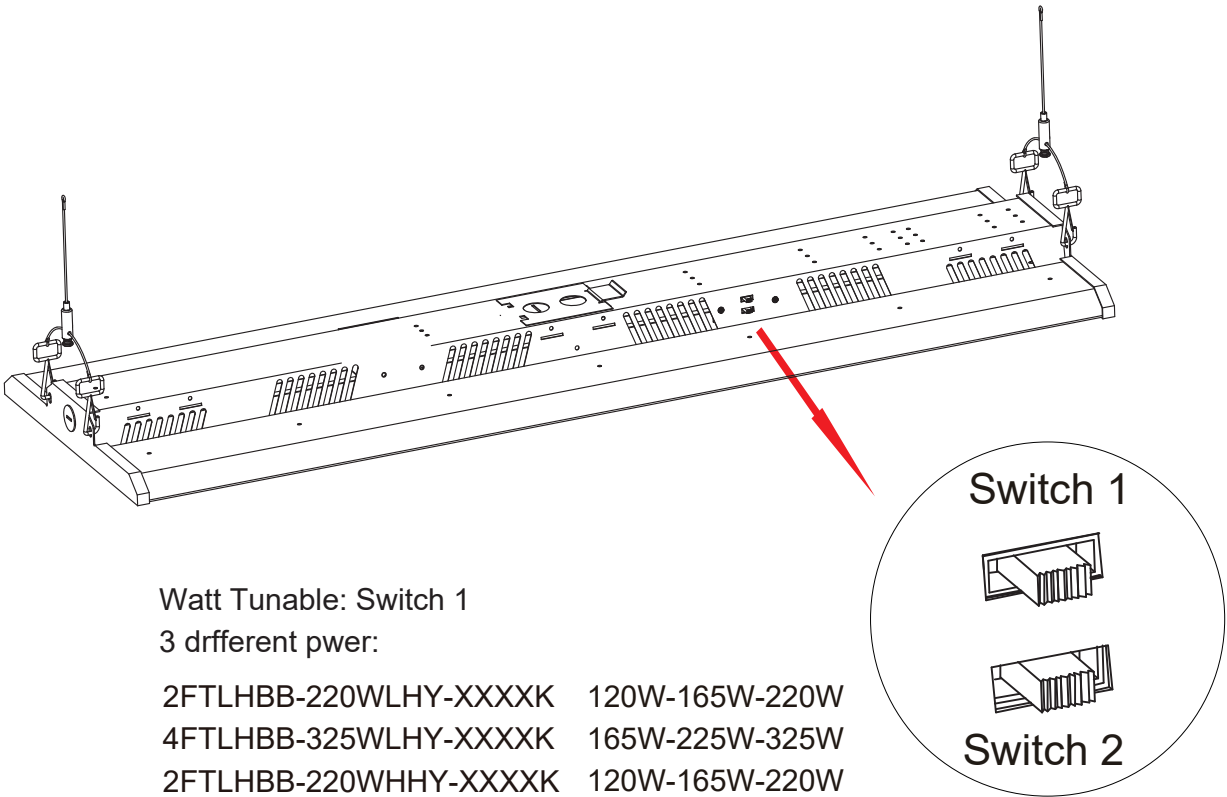


Watt Tunable: Switch 1
3 drfferent pwer:

2FTLHBB-220WLHY-XXXXK	120W-165W-220W
4FTLHBB-325WLHY-XXXXK	165W-225W-325W
2FTLHBB-220WHHY-XXXXK	120W-165W-220W
4FTLHBB-325WHHY-XXXXK	165W-225W-325W

CCT Tunable: Switch 2
4000K-5000K

MOUNTED TO LINEAR HIGH BAY LIGHT

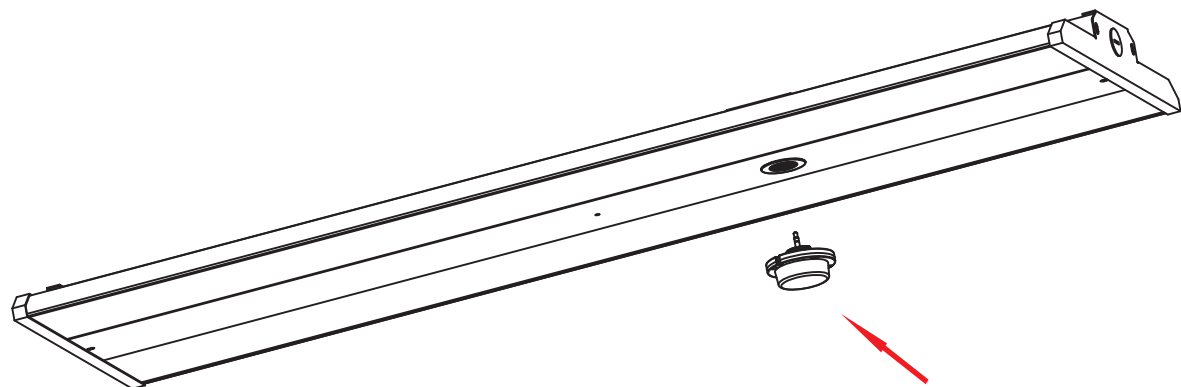

Installing a sensor.


Model Number	Sensor Type	Connector	Controller
EFS106-AUX  Bluetooth	PIR	Audio Jack	Keilton APP
EFS07-AUX			SPEC-RM51
ANT-6-4T			RC-100
HD07VR-PH-1			HD06R
HD07VR-PHB-1  Bluetooth			HAISEN BLUE APP
EFS06R-AUX.A4	Microwave		SPEC-RM51
ANT-5-4T			RC-100
HD07VR-MH-1			HD06R
HD07VR-MHB-1  Bluetooth			HAISEN BLUE APP

Networked Lighting Controls: HAISEN BLUE / GEBC / Keilton


INSTALLATION INSTRUCTIONS

Please cut off the power before installation


1. Remove the dust proof cover.

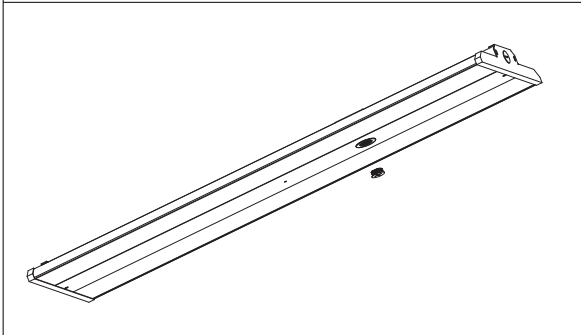


2. Installing a sensor.

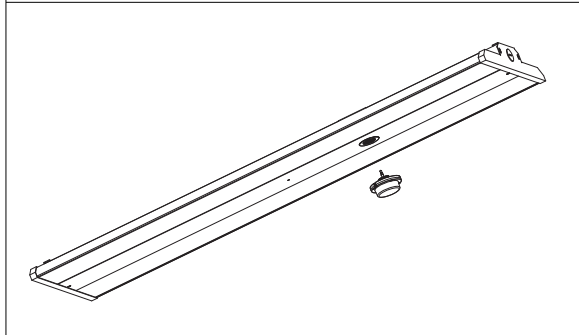


3. Drill two holes in the ceiling put the hook into the hole.

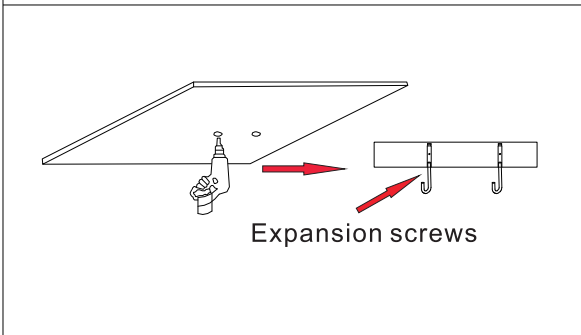


4. Take Y shape stainless steel rope out of the package.

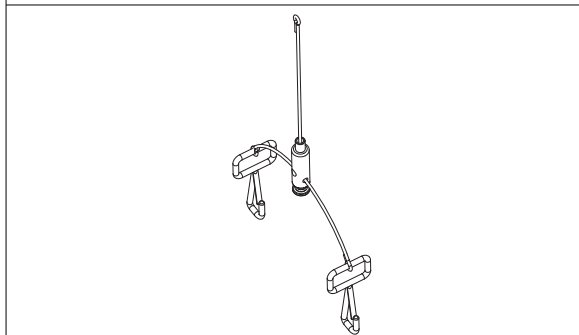


5. Insert the hook into the slotted holes as shown below.

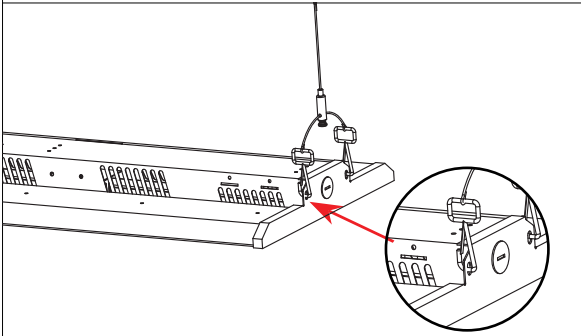


6. Hook up the safety steel on the ceiling anchor.

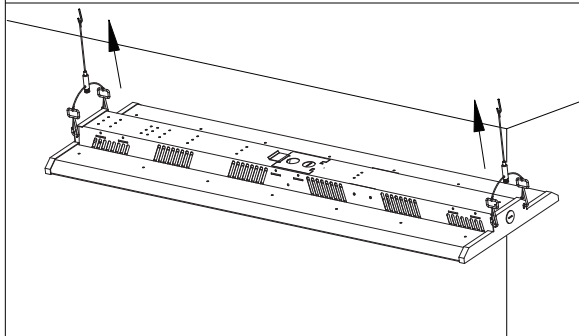

7. Turn off power, and make wiring connections with screw-on wire connectors insert the terminal cap and wires into the driver box.

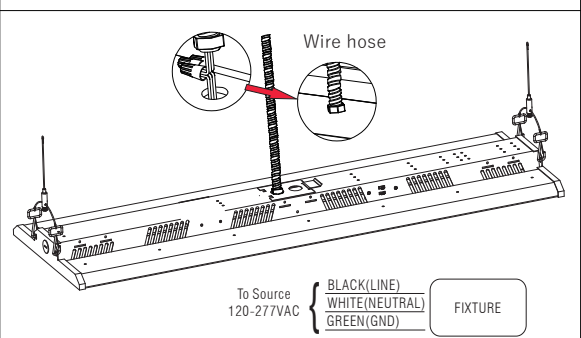


8. Toggle the dip switch to required power.

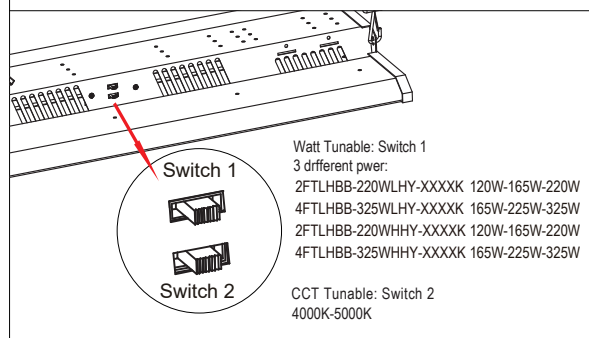

Packing /weight

Part NO.	Outer Carton Size (LxWxH)	Qty/Carton (pcs)	20GP (QTY)	40HQ (QTY)
2FTLHBB-220WLHY-XXXXK	25.12"*8.66"*12.13" (638*220*308mm)	4	2528	6076
4FTLHBB-325WLHY-XXXXK	49.13"*8.66"*12.13" (1248*220*308mm)	4	1304	3128
2FTLHBB-220WHHY-XXXXK	25.12"*8.66"*12.13" (638*220*308mm)	4	2528	6076
4FTLHBB-325WHHY-XXXXK	49.13"*8.66"*12.13" (1248*220*308mm)	4	1304	3128

Packing

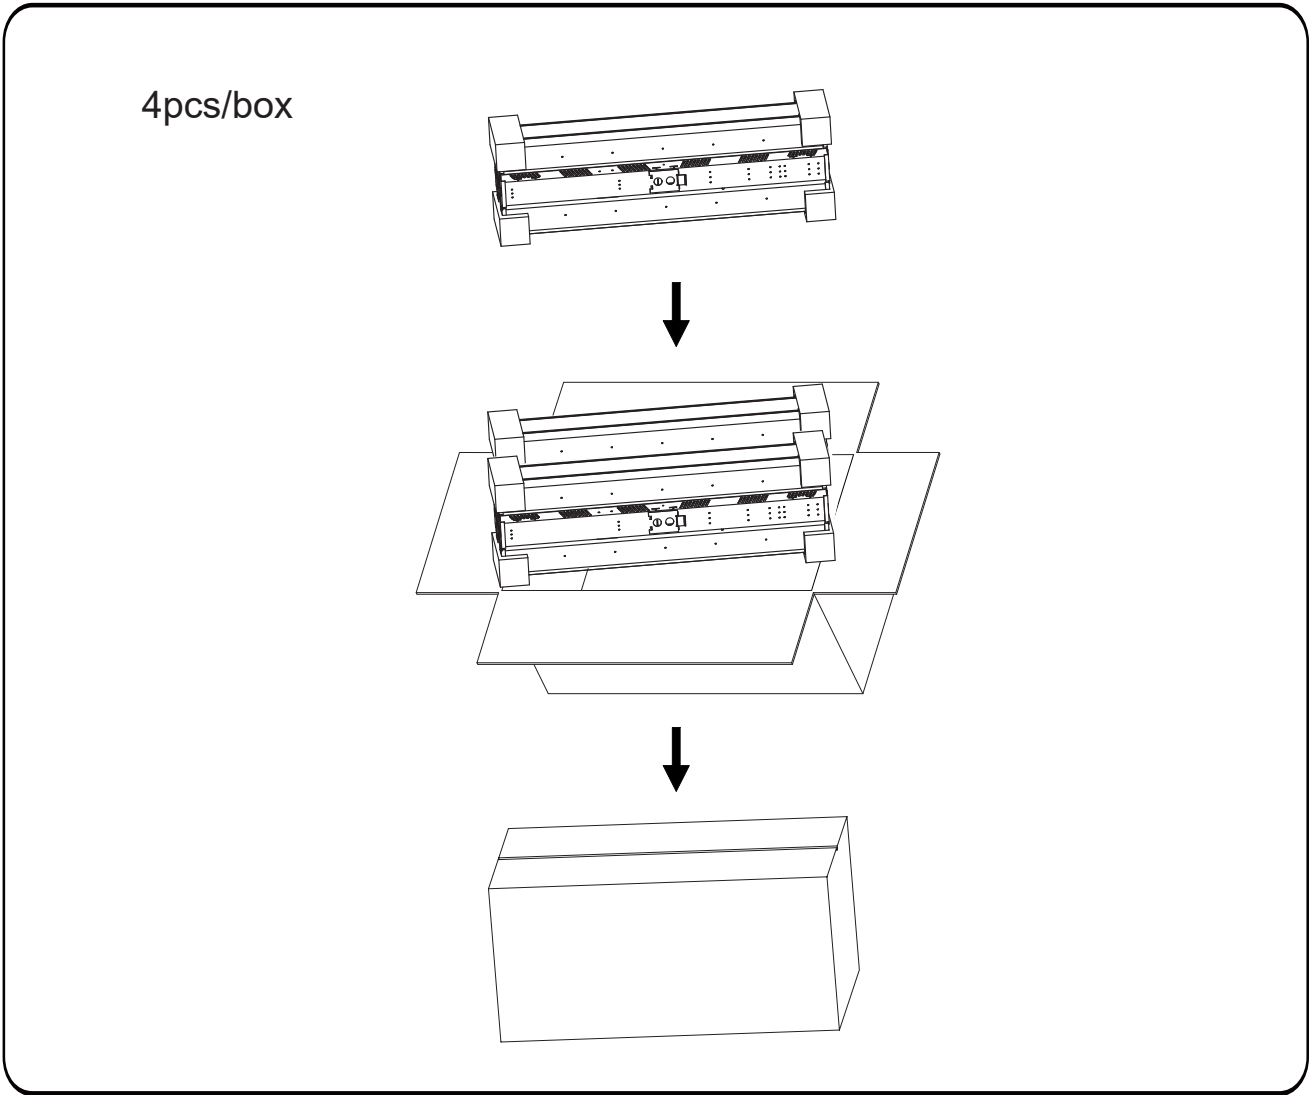

LED Linear High Bay



Note

- 1.The installation and maintenance must be completed by electricians or professionals.
 - 2.Please cut off the power before installation and maintenance.
 - 3.The fixture is not allowed to be covered by thermally insulating material.
 - 4.Please keep away from the corrosive substance,and keep the fixture dry and clean.
 - 5.Working temperature:-4°F~104°F,storage temperature:-22°F~140°F.
-