

LED WALL PACK LIGHT (WK07)

WATTAGES: 120/100/80/60/40W Tunable



With its simple innovative design, WK07 Series Full Cutoff Wall Pack offers the trusted traditional installation method — now a top choice among customers.



Product Features:

- Aesthetic, utility appearance, and patented;
- Optically designed PC cover, almost no dark macula, which makes the whole lamp emit light evenly and meets the requirements of DLC Premium 6.0;
- Adopt high light transmission and antzi-UV PC lampshade;
- Low-voltage light control sensor can be installed, which is safe and reliable;
- Power and CCT selectable are available to meet the different needs of customers and reduce the inventory pressure ;
- Easy and fast installation , and traditional junction box installation method is retained;
- Standard respirator extends the service life of lamps.
- IP65, completely waterproof and dustproof;
- 120-277V / 0-10V and 120-347V/277V-480V 0-10V dimming power supply are available.

SPECIFICATION	
MODEL	SS-WK07-120W
WATTAGE	120/100/80/60/40W Tunable
LUMENS	16800LM(Max)
CCT	3000K/4000K/5000K Tunable
CRI	Ra>70
INPUT VOLTAGE	AC120-277V/AC120-347V/AC277-480V
OPERATING TEMPERATURE	-40°F~113°F
STORAGE TEMPERATURE	-40°F~158°F
POWER FACTOR	> 0.9
DRIVER EFFICIENCY	> 90%
PROTECTION LEVEL	Wet Location
LIFE TIME	> 50000 hours
WARRANTY	5 years limited

LED WALL PACK LIGHT (WK07)



WATTAGES: 120/100/80/60/40W Tunable

PACKING/WEIGHT:

Model	Packing	Size	Net Weight	Gross Weight	pcs/ctn
120/100/80/60/40W	Outer packing Size	L15.16"xW9.76"xH8.07" L385xW248xH205mm	6.83Lbs(2.70Kg)	5.95Lbs(3.10kg)	1 pcs/ctn

PRODUCT DIMENSION:

120W / 100W / 80W / 60W / 40W

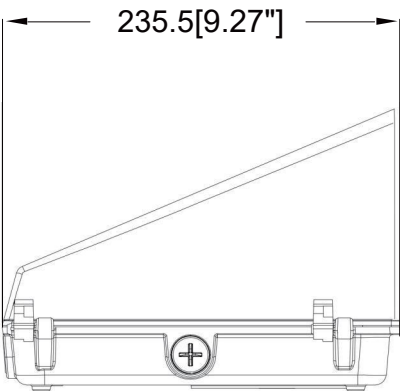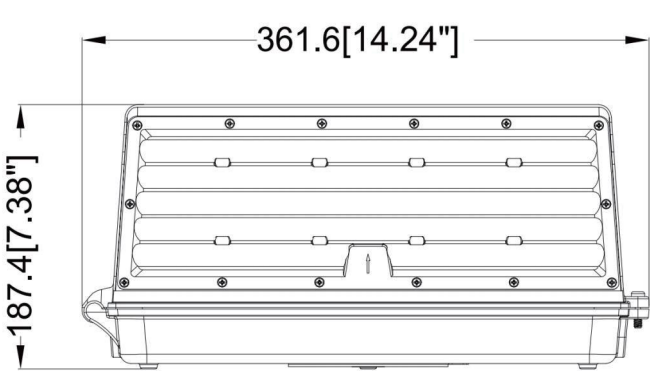

Product Accessories

ACCESSORIES MOUNTING BRACKETS(Standard)



4 Pcs Screws



5 Pcs Wire Nuts



1 Pcs foam

ACCESSORIES(Sold Separately)



ANT-5-4T
ANT-6-4T



ANT-5-16B-3



Emergency Driver

LED WALL PACK LIGHT (WK07)

WATTAGES: 120/100/80/60/40W Tunable

ORDERING GUIDE: EXAMPLE:


SS-WK07-120W-H-XX-TCP-Y

SS	WK	120W	H	XX	TCP	Y
COMPANY	PRODUCT	POWER	HIGH LUMENS	INPUT VOLTAGE	Tunable CCT and Power	CONTROL
	LED WALL PACK LIGHT 120W=120/100/80/60/40W (WK07)			Blank=120-277Vac MV=120-347Vac HV=277-480Vac	(3000K/4000K/5000K)	A: PIR sensor (Infrared sensor) B: MS sensor (occupancy sensor) C: BRT sensor (occupancy+bluetooth) D: PHB sensor (Infrared bluetooth) Blank: no provide sensor


PHOTOMETRICS:

For complete IES files, please visit our website.


SS-WK07-40W-H-5000K

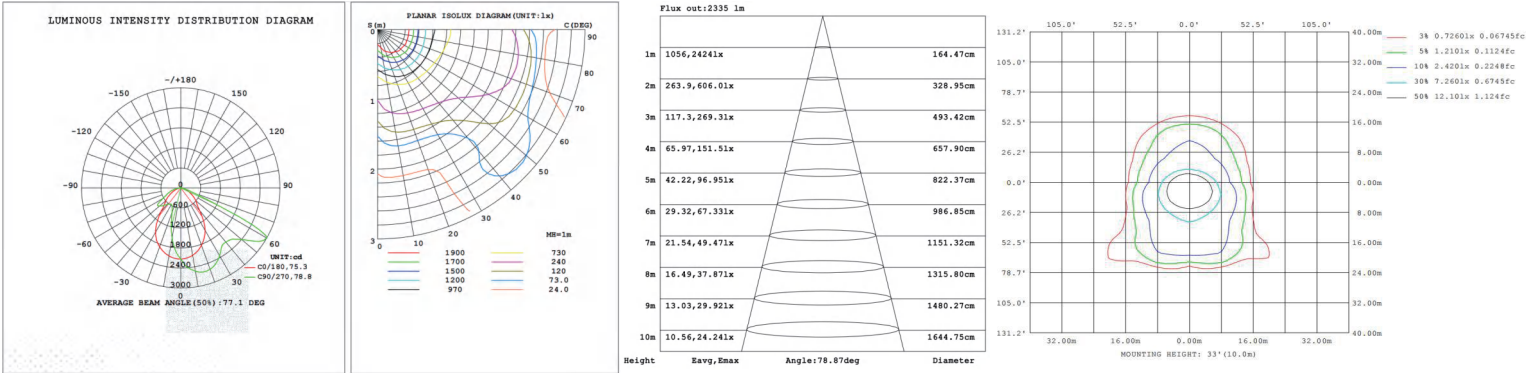

SS-WK07-60W-H-5000K

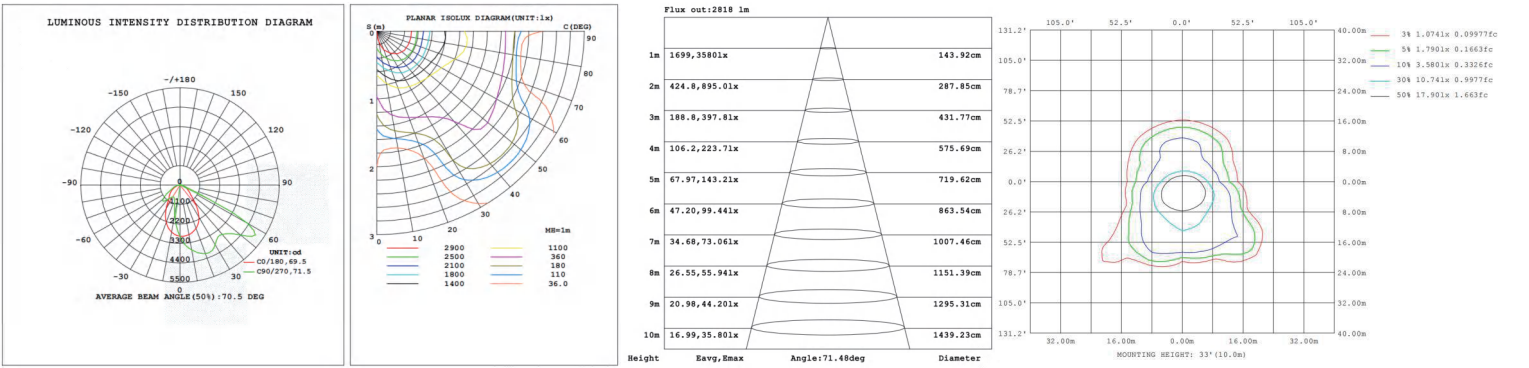


SS-WK07-80W-H-5000K

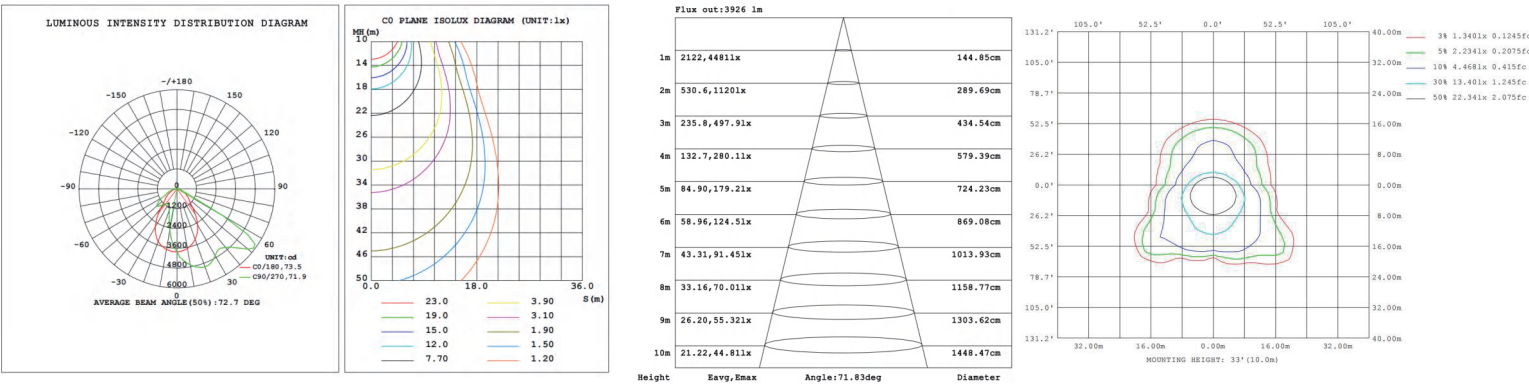


LED WALL PACK LIGHT (WK07)

WATTAGES: 120/100/80/60/40W Tunable

SS-WK07-100W-H-5000K

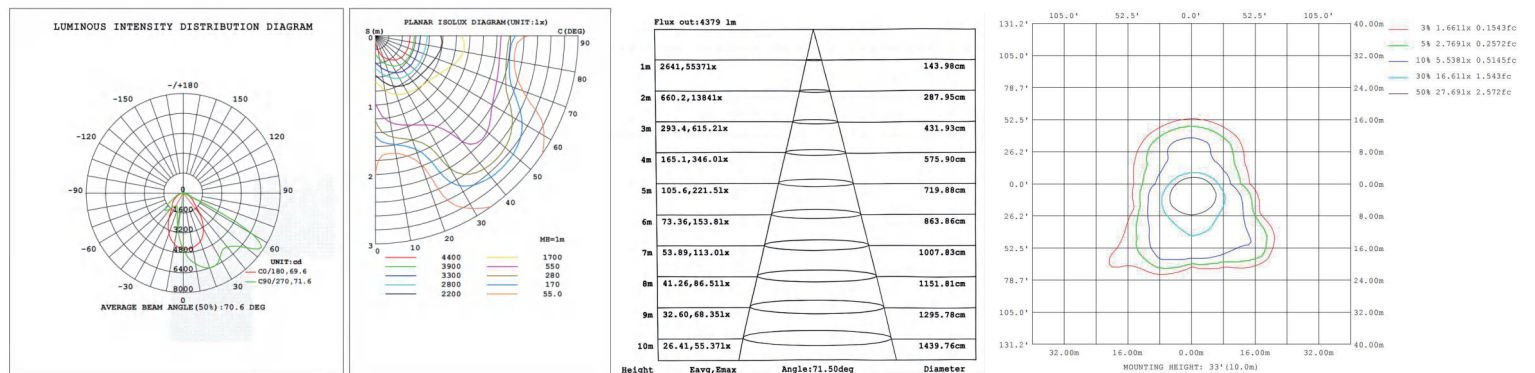


SS-WK07-120W-H-5000K

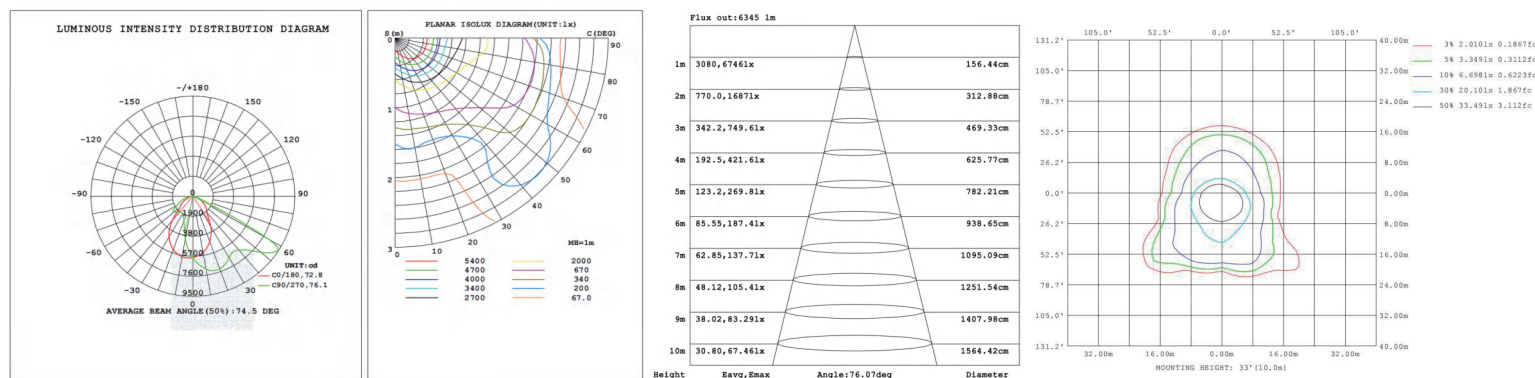


Installation Instruction


1. Use a screwdriver to unscrew the lamp screws and remove the upper half of the fixture.

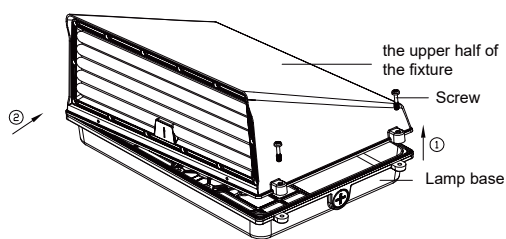


2. Unscrew the cover of the entry hole on the lamp base and remove the cover.

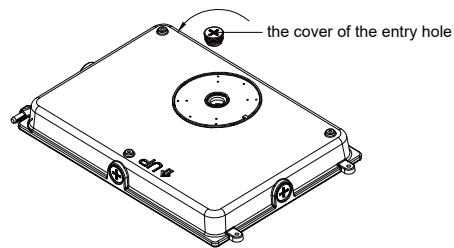

3. According to the embedded terminal box, punch the corresponding mounting hole on the light's mount.

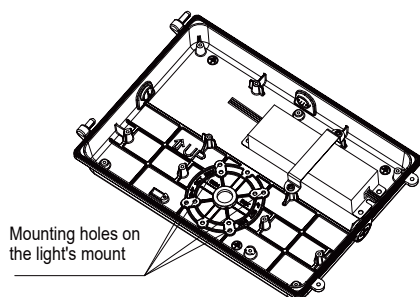


4. Put the input line in the embedded box passes through the waterproof pad and then passed through the lamp base.

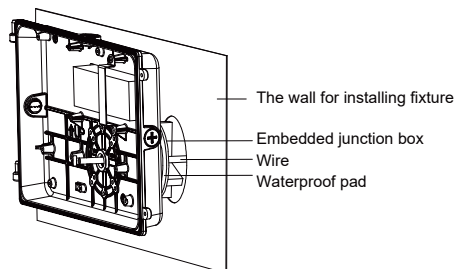


LED WALL PACK LIGHT (WK07)

WATTAGES: 120/100/80/60/40W Tunable


5. Use screw to lock the lamp base on the embedded junction box.




6. Connect the input wire and the dimming wire of the light, then put the connected wires into the embedded terminal box.

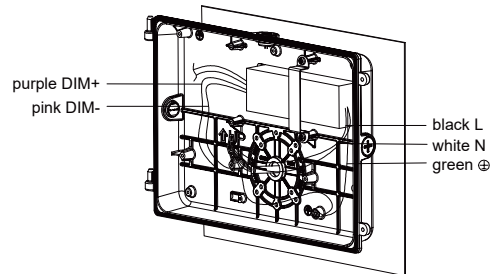

7. Connect the output wires of driver with the wires of PCB board.

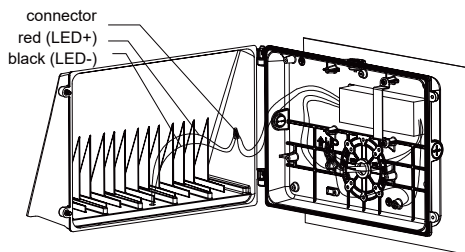

8. Use screws to lock the fixture. Installation completed.



Applications:

